Genway

G9 STAINLESS DOOR STATIONS

CQM FC CE RoHS

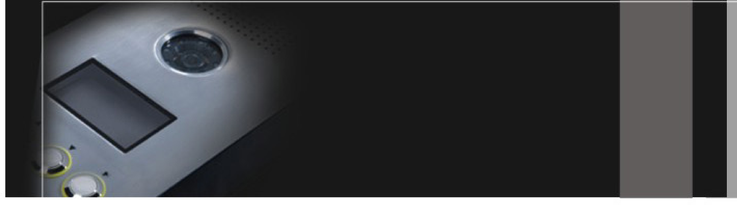

G9 STAINLESS DOOR STATIONS

ALL FUCTIONS GO INTO

ONE!

Based on C5 one cable system's cutting-edge technology, and listening attentively to the voice of the customers,these function-versatile,user-friendly and environment-tolerant Genway G9 series stainless door stations are landing on the market. We only dedicate to satisfy our customers to the highest degree.

FEATURES















1. Stainless **SAFETY SCREWS** and 3 mm-thick vandal-proof steel panel, waterproof design.
2. The **SERVICE BUTTON** allows direct entry of milk/postman within your set time.
3. When you press the wrong button,The **MACHINE TALKS** to remind you:"Wrong button, please try again!".
4. **YELLOW COLOR-BLINDNESS REMINDER** around steel buttons! Special WE care special group.
5. You can **SCROLL THE OWNER'S NAME** in LCD display when you are unsure which button to press.
6. The enclosed **REMOTE CONTROL** provides as easy as A-B-C programming, you can easily define any port of the distributor to any indoor phone.
7. 1/3' CMOS color camera is **ADJUSTABLE** with screw driver. The IR illumination offers night vision.
8. The **MODULAR DESIGN**, even one function fails, for example camera,the intercom still works as usual.
9. Nameplate changable **BY HAND** ,easy as 1-2-3 with correct instruction.

Note:Please check the left illustrations with matched no.for clearer understanding.

COMPATIBLE INDOOR PHONES, JUST PICK IT!

3001

3005

3006

3051 4″color TFT

3056 3.5″color TFT

G9 FOR SINGLE FAMILY

AUDIO DOOR ENTRY SYSTEM

The system contains 2 items, with and without SERVICE button & Proxi(5403D/5403).All audio indoor phones optional and one door station can support max. 4 indoor phones. Only when there needs 2 or more indoor phones need the 4110S distributor, or distibutor is unnecessary.

SYSTEM DIAGRAM

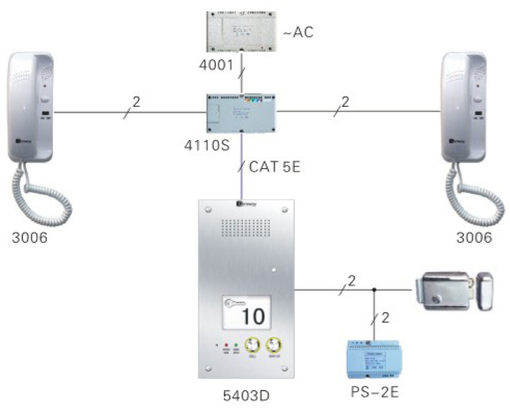

Note: PS-2E is a power supply with 12VDC for lock.

5403D

5403

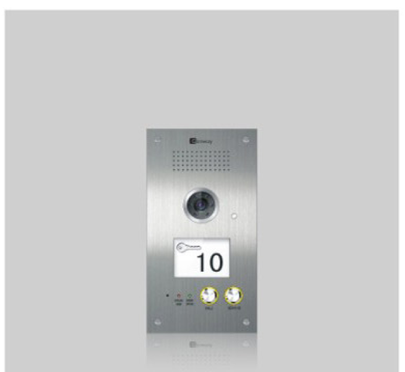

5403D－C

5403－C

VIDEO DOOR ENTRY SYSTEM

The system contains 2 items, with and without SERVICE button & Proxi (5403D-C/(5403-C).Both audio and video indoor phones optional. The system can suppor max.4 indoor phones, only when there needs 2 or more indoor phones requrie 4110S distributor, or the distributor is unnecessary.

SYSTEM DIAGRAM

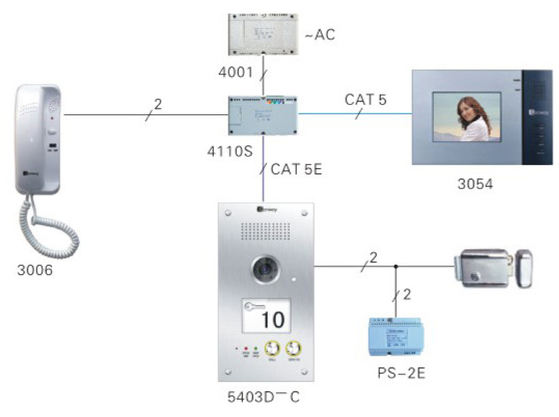

Note: PS-2E is a power supply with 12VDC for lock.

Genway



3054 5″color TFT

3064 7″color TFT

3065 4″B/W CRT

3070 4″B/W CRT

G9 DIRECT-CALL FOR MULTT-APARTMENT

AUDIO DIRECT-CALL DOOR ENTRY SYSTEM

The system contains 4 items, all contain SERVICE button & Proxi, optional among 1x2,1x4,2x3,2x4 buttons.All audio indoor phones optional. Only 1 pc 4001 power supply is enough for all items.

SYSTEM DIAGRAME

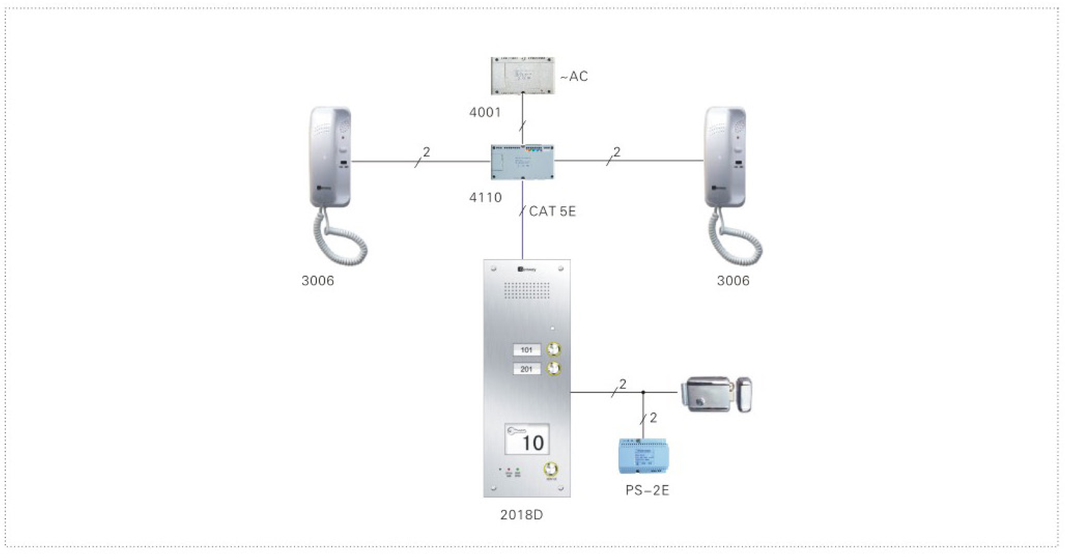

Note:1. PS-2E is a power supply with 12VDC for lock
2. When one apartment needs 2 or more indoor phones, needs distributor 4110s

VIDEO DIRECT-CALL DOOR ENTRY SYSTEM

The system contains 4 items, all contain SERVICE button & Proxi, optional among 1x2,1x4,2x3,2x4 buttons.Both audio and video indoor phones optional. Only 1 pc 4001 power supply is enough for all items.

SYSTEM DIAGRAME

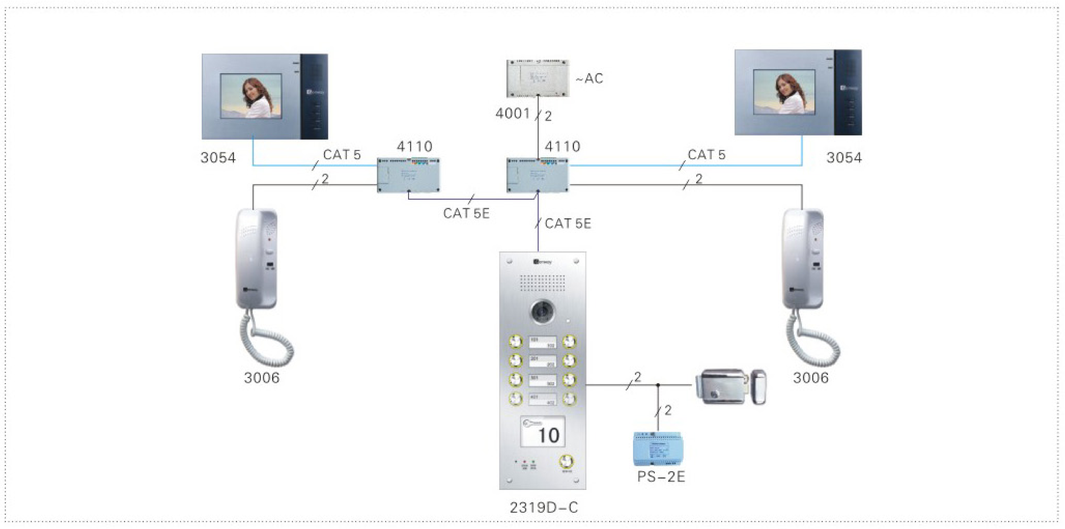

Note: 1. PS-2E is a power supply with 12VDC for lock.
2. When one apartment needs 2 or more indoor phones and secondary door. station, needs distributor 4110S.

2018D

2020D

2022D

2028D

2313D-C

2315D-C

2317D-C

2319D-C

G9 DIGITAL FOR MULTT-APARTMENT

AUDIO DIGITAL DOOR ENTRY SYSTEM

2551D–C can support 800 users within 150 meters(The distance from door staion to last indoor phone).All audio indoor phones1 pc 4001 power supply can support 10 pcs 4110/4110s distributors, namely 40 pcs indoor phones.

SYSTEM DIAGRAM

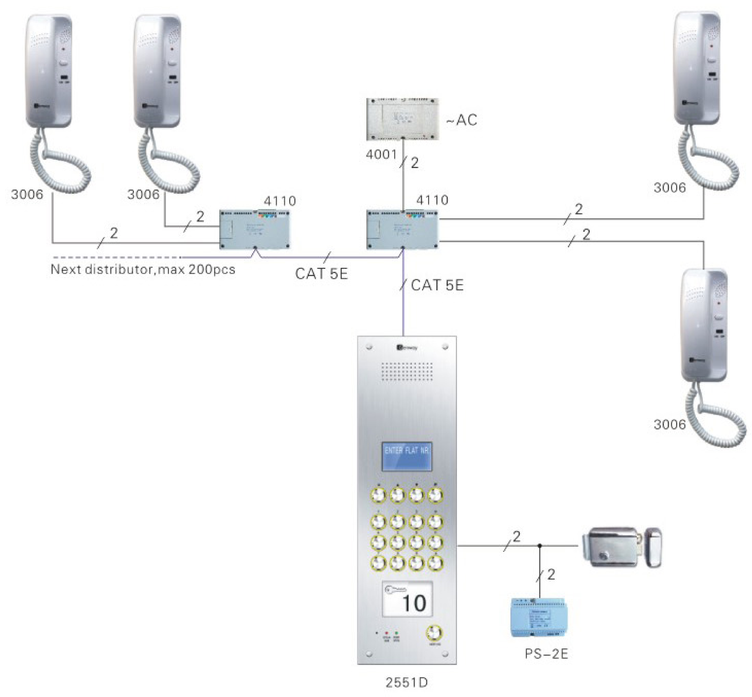

2551D

2608–C

2608D–C

Note:1. PS–2E is a power supply with 12VDC for lock.
2. When one apartment needs 2 or more indoor phones, needs distributor 4110S.

VIDEO DIGITAL DOOR ENTRY SYSTEM

The system contains 2 items, with and without SERVICE button & Proxi(2608D–C/2608–C), the door station can support 800 users within 150 meters(The distance from door station to last indoor phone).Both audio and video indoor phones optional. 1 pc 4001 power supply can support 6 pcs 4110/4110s distributors, namely 24 indoor phones.

SYSTEM DIAGRAM

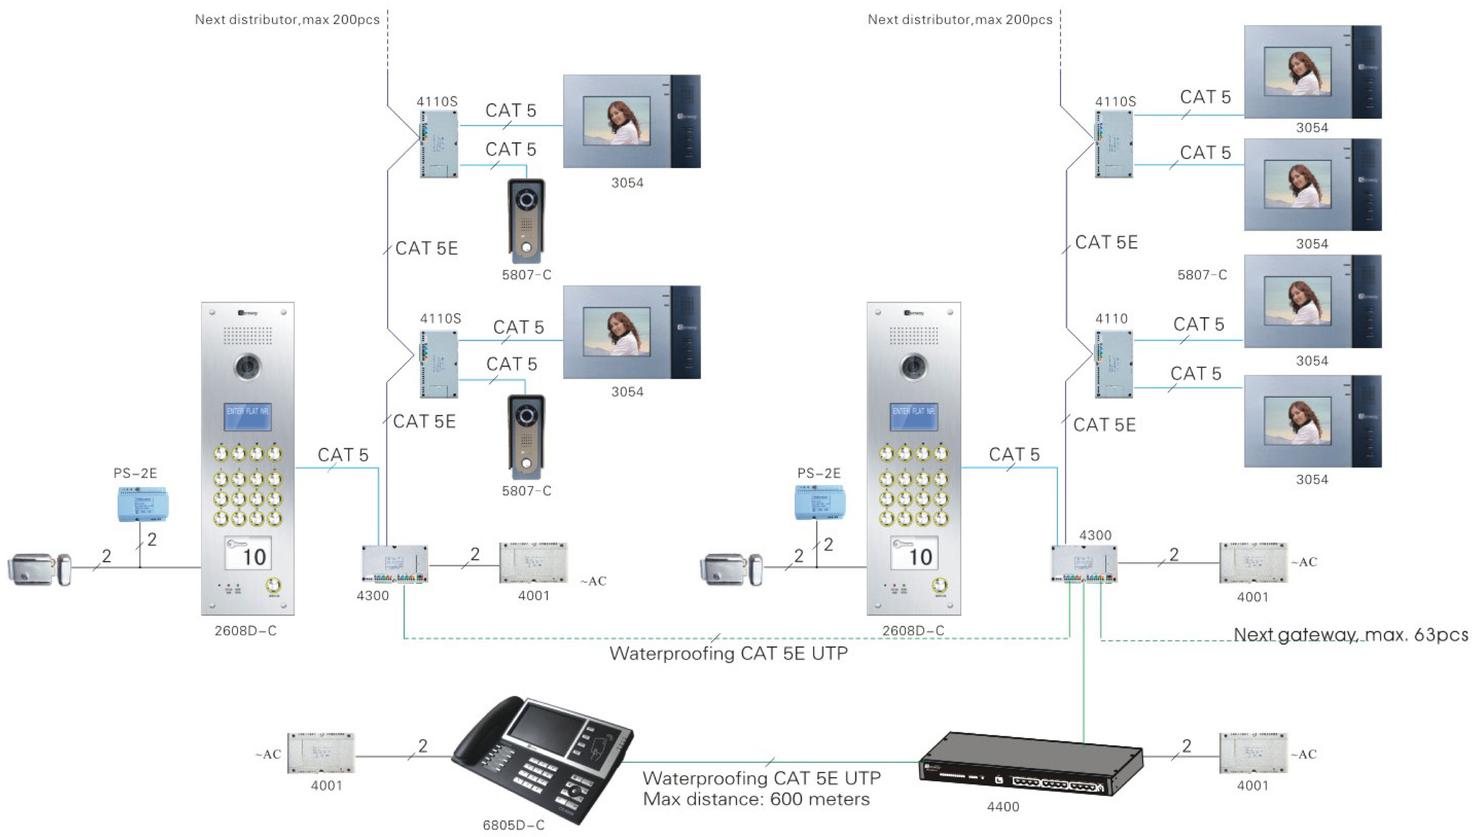

Note:1. PS–2E is a power supply with 12VDC for lock.
2. When one apartment needs 2 or more indoor phones and secondary door station, needs distributor 4110S.
3. 4300 is the gateway to connect door stations in different buildings to hook up into the same system.
4. 4400 is the switch to connect gateway with guard unit.
5. 6805D-C is the guard unit to manage the whole comunity using this system.

G9 STAINLESS DOOR STATIONS PARAMETERS

PHOTO	MODEL NO.	DESCRIPTION	YES/NO PROXI	(+)SERVICE BUTTON	QUIESCENT CURRENT (DC 35V)	OPERATING CURRENT (DC 35V)	PRODUCT INNER BOX (MM)	PACKING DIMENSION(MM)	NET WEIGHT (KG)	GROSS WEIGHT (KG)
DOOR STATIONS FOR SINGLE FAMILY										
	5809D-C	Video single family house, color CMOS	Yes	Yes	≤50mA	≤180mA	272×150×68.5	323 x186 x 103	2.10	2.60
	5809-C	Video single family house, color CMOS	No	No	≤50mA	≤160mA	272×150×68.5	323 x186 x 103	2.10	2.60
	5403D	Audio single family house	Yes	Yes	≤50mA	≤130mA	272×150×68.5	323 x186 x 103	2.00	2.50
	5403	Audio single family house	No	No	≤50mA	≤110mA	272×150×68.5	323 x186 x 103	2.00	2.50
DIRECT CALL DOOR STATIONS FOR MULTI-APARTMENT										
	2313D-C	Video direct call1x2,color CMOS	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2315D-C	Video direct call1x4 buttons, color CMOS	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2317D-C	Video direct call 2x3 buttons, color CMOS	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2319D-C	Video direct call 2x4 buttons, color CMOS	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2018D	Audio direct call1x2 buttons	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2020D	Audio direct call1x4 buttons	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2022D	Audio direct call2x3 buttons	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
	2028D	Audio direct call2x4 buttons	Yes	Yes	≤50mA	≤180mA	410×150×68.5	461 x186 x 103	2.84	3.70
DIGITAL DOOR STATIONS FOR MULTI-APARTMENT										
	2608D-C	Video digital,color CMOS	Yes	Yes	≤50mA	≤200mA	500×150×68.5	534 x186 x 103	3.30	4.30
	2608-C	Video digital,color CMOS	No	No	≤50mA	≤180mA	500×150×68.5	534 x186 x 103	3.30	4.30
	2551D	Audio digital	Yes	Yes	≤50mA	≤150mA	500×150×68.5	534 x186 x 103	3.20	4.20
Remarks:	1.All items use the operating voltage of 35VDC,flush mounted. 2.All items work perfectly among the temparature of -40℃~+70℃. 3.For video CMOS camera:PAL, Adjustable Angle: ±10°.									

Note:For the actual dimension and weight in shippment, there might be slight variation.

www.doorphone.cn

KEY Manufacturer:

Xiamen Genway Security Technology Development Co.,ltd.
Contact person:Ms.Alice (Overseas Dep. Manager)
Add:NO.23 Wanghai Road, Software Park 2, Luling Road,Xiamen, China
E-mail:alice@doorphone.com.cn
Tel:+86-592-5747548/2618880
Fax:+86-592-5625072