

Instructions For Magnetic Locking Devices

☆ Technical Parameters:

- A. Holding power: 230KGS、280KGS、380KGS、500KGS
- C. Working Current: 320mA
- lock, Power-off to open.
- E. Typical Installation: Flushing (A)、Hanging (G)
Opening (X)、For Feedback (F)

- B. Working Voltage: 12VDC
- D. Safety mode: Power-on to


- F. Append: LED (D)、Time Delay

☆ Installtion chart

Hanging Type Electromagnetic Lock of doors.

Electromagnetic Lock fitting for all kinds

☆ Typical Installation:

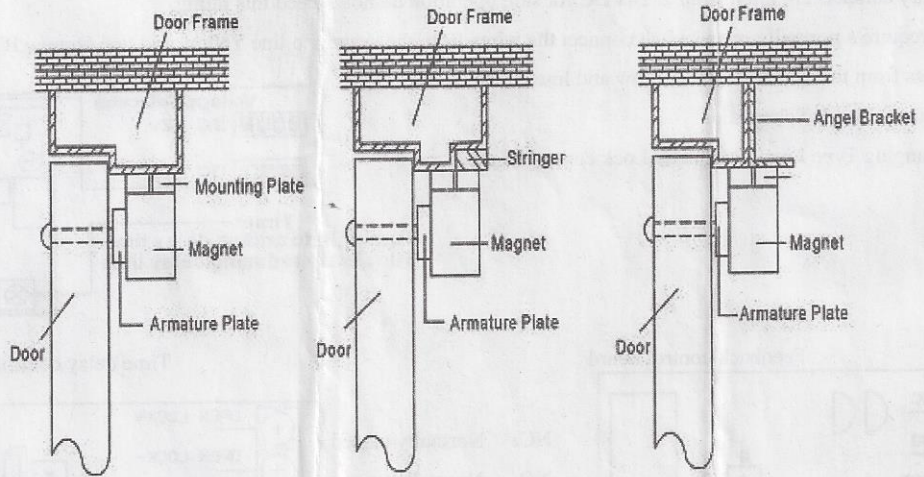

STEP 1

- A. Fold template along dotted line.
- B. Place template against door and head frame.
- C. Drill holes as indicated on temple.

STEP 2


- A. Mount the armature palte to door using 1 rubber washer sandwiched between 2 steel washer(the rubber washer and 2 steel washer are installed on the through sexnut between the armature plate and door).

STEP 3

- A. Install the mounting plate with 2 flat head screws(the 2 M5X5 flat head screws are installed in the solotted holes for adjustment).
- B. Adjust mounting plate so that it forms right angle with the armature plate.
- C. Using the mounting plate as a temple,drill the wire hole.
- D. Drill and remaining mounting screws.

STEP 4

- A. Instal magnet to mounting plate with 2 M4 screws supplied.

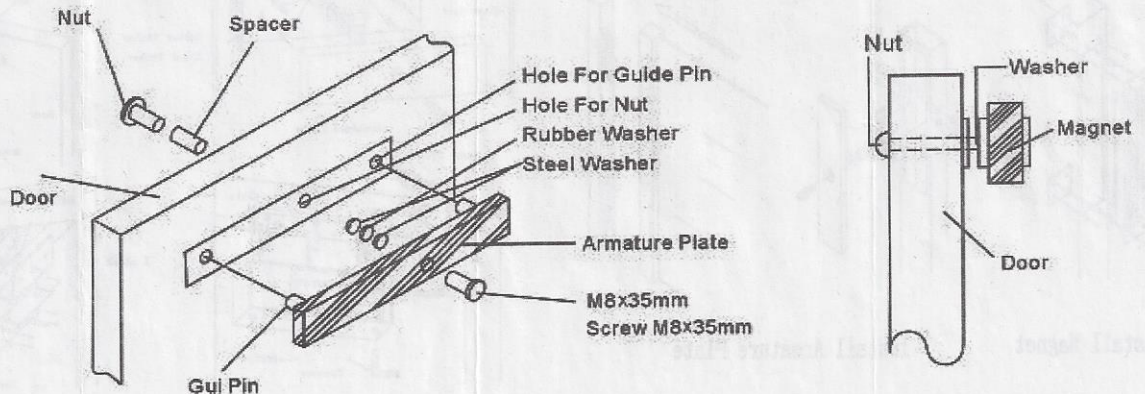

STEP 5

A. Test all functions of this model(see wiring instruction).

☆ Armature Plate Mounts To The Door:

Important: Fix the armature plate not too tightly, and make the rubber washer more flexible, in order to make the armature plate automatically adjust its proper position with magnet.

☆12VDC Input:

A. Required power 0.5Amp (Maximum).

B. Connect the ground (-) lead from a 12VDC power source to line Black.

C. Connect the positive (+) lead from a 12VDC power source to line Red.

D. Check jumper for 12VDC peration.

☆24VDC Input (Just for 500GF、230GF):

A. equired power 0.5Amp (Maximum) .

B. Connect the ground (-) lead from a 24VDC power source to line Black.

C...Connect the positive (+) lead from a 24VDC power source to line Red.

D. Check jumper for 12VDC peration.


☆Contacts:

A. Relay dry contacts are rated lamp at 24VDC for safe operation do not exceed this rating.


B. If you require a normally open switch connect the wires from the system to line Yellow and line Orange.If you require a normally closed switch connect the wires from the system to line Yellow and line Green.

☆Printed Circuit Board Schematic:

500GF Hanging Type Electromagnetic Lock control board

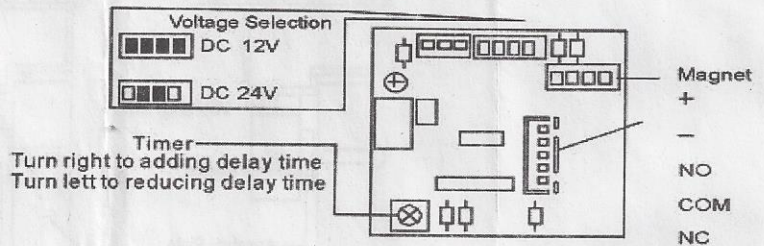

Feedback control board

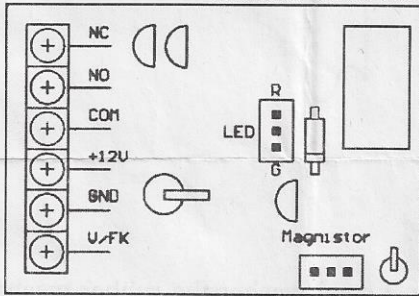

NC: Normally closed


NO: Normally open

COM: Common

+12V: Power positive

GND: Power negative

Time delay control board

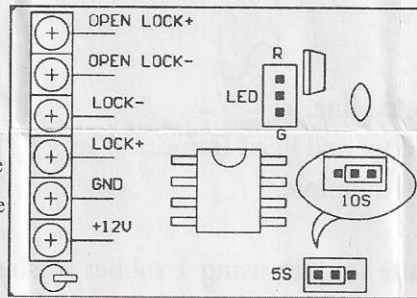

OPEN LOCK+: Input positive

OPEN LOCK-: Input negative

LOCK-: Drive negative

LOCK+: Drive positive

GND: Power negative

+12V: Power positive


* Important:

A. The product should only be passed power supply.

B. If power switch is not wired between DC source voltage and magnet it will take time to de-eneraize the magnet simulating residual magnetism(see below).


C. Please make sure your jumper pin corrent or not.

AC 110V/220V

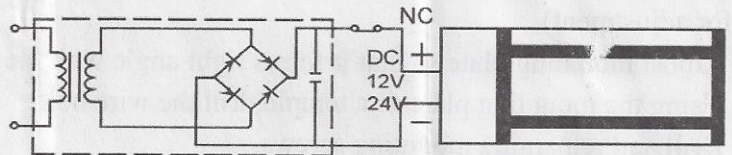


☆ Other installation

Install Flush Bonding Type Electromagnetic Lock

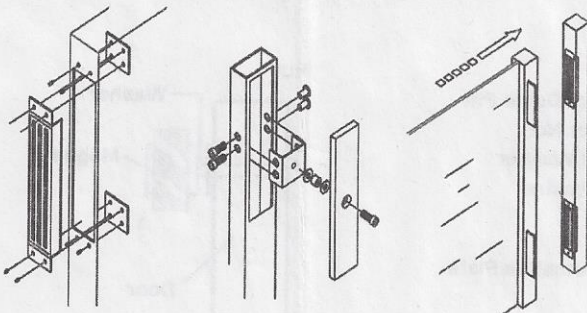


Install Magnet

Install Armature Plate




Rubber Washer
Steel Washer




Rubber Washer

Screw #10



Spanner

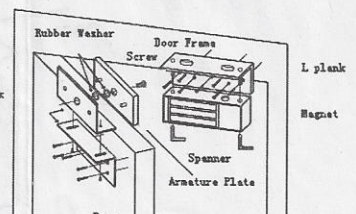

Spanner

L plank
Magnet