


Outdoor Camera (Outdoor Station)

**Features:**

- Suitable for 4-wires Single Entry system, compatible with VT6xx series of monitors
- Call button with blue backlight , up to 4 Monitors directly
- Flush mount, and easy to be installed in a 86x86 box
- Capable of installing with Rainy Cover RH58 in flush or surface mount.

**Parts and Functions:**

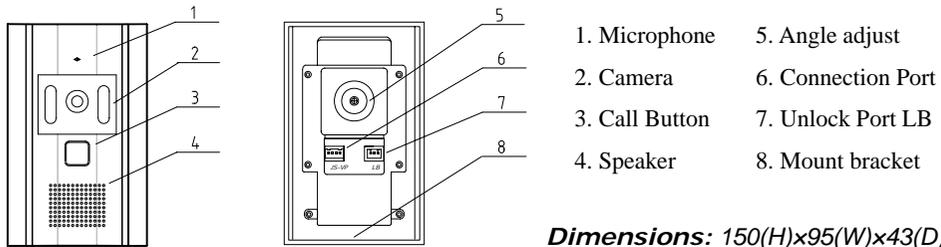


**Parts List:**

- VT584 unit; C3-4P cable to connect Monitor; C3-3P cable to connect lock

**Mount Instruction:**

- Cut a hole in 75X75X35mm size on the wall, and fix mounting bracket. If possible, an existing 86x86 box can be used.
- Wire the cables, and test the single entry system until it works. Adjust the camera angle if necessary.
- Fix body with bracket, then tight the screw firmly.

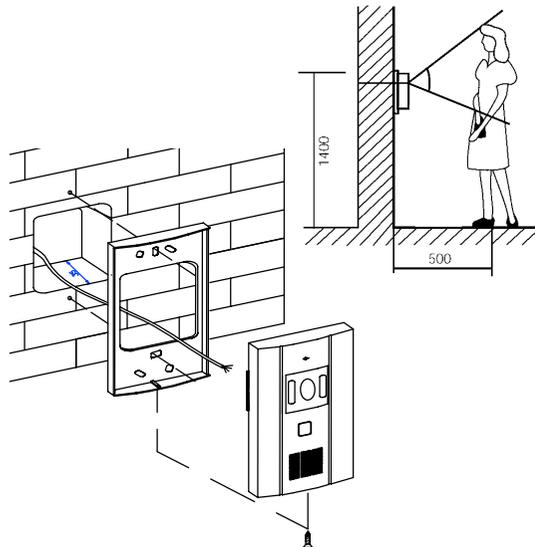

**Precautions:**


- Do not install in a place where there would be a bright light behind a visitor (or where there would be a bright background), or in a place where the camera lens would be directly exposed to sunlight or a bright light. If light comes in on the unit's screen, the image looks white or silhouetted. But this is not a unit trouble.
- Do not install the unit in places where High or extreme cold temperature, moisture or humidity extremes, Constant vibration or impact, steam or smoke.

**Specifications:**

- Power Supply: DC 10~12V (Powered by Monitors)
- Power Consumption: 150mA in working state (not including the latch activating)
- Video Output: 75Ohm Impedance, 1Vp-p, CCIR standard (unless specified)
- Camera: 76 degree, CCD or CMOS camera with IR-LED for night vision
- Working temperature: -10 ~ 40 degree


**Electronic Latch connecting instructions**

- **Mode 1: With Monitor's JP-LK Jumper (Dry contact)**



Extra power supply for latch must be installed, and nearly all kinds of electronic latch can be used, please see Note 2 for reference. Incidentally, in this mode, you can continue talking and monitoring during unlock operation.

- **Mode 2: Without JP-LK Jumper (DC output)**

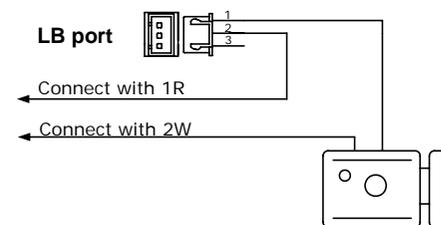

The Latch can directly connect with the Door Station and the power through monitor. During unlock operation, the monitor will close screen automatically. The Latch is rated voltage is 12V, less than 500mA consumption.

**Note: Please use right and specific Latch.**