PC7 and PC7H Intelligent Power Supply Combo

1. Description:



PC7



PC7H

2. Wiring:

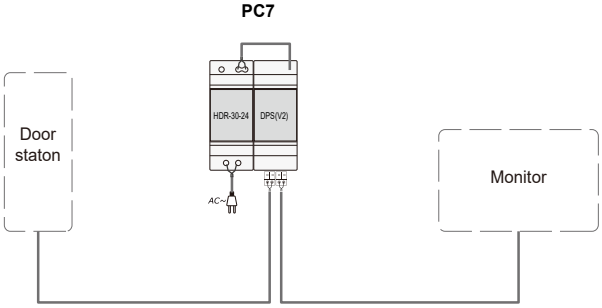

3. Specification PC7:

Input Voltage:	100~240Vac
Input Frequency:	50~60Hz
Rated Output Voltage:	DC 28V
Rated Output Current:	1.5A
Working Temperature:	-10^{0}C~50^{0}C
SW Port Input Voltage:	Max.230Vac, 1.5A
Dimension:	70x98x59mm

Provides power for up to 12 x WiFi monitors;
up to 32 x usual monitors

4. Specification PC7H:

Input Voltage:	100~240Vac
Input Frequency:	50~60Hz
Rated Output Voltage:	DC 28V
Rated Output Current:	2.5A
Working Temperature:	-10^{0}C~50^{0}C
SW Port Input Voltage:	Max.230Vac, 2.5A
Dimension:	88x98x59mm

Provides power for up to 18 x WiFi monitors;
up to 32 x usual monitors

5. Warning:

- The unit can only be used for DT 2-wire series door entry systems
- Do not connect the unit to any power source outside the input voltage range stated
- Do not dismantle or alter the unit
- The unit must be installed and wired by a qualified technician
- Keep the unit away from water or any liquids. Danger of fire or electric shock

Note: The AC cable is not supplied in the package. Connect 1mm power flex cable